





- Article features
- Very compact
 - Excellent for retrofitting, as the primary circuit does not have to be interrupted
 - Especially suitable for digital measuring instruments
 - Super fast and easy installation
 - Transformer secured by UV-resistant cable ties
 - This cable conversion current transformer is supplied with multi-colour coded connection leads

Technical data	
Round conductor	Ø 18 mm
Dimensions (W × H × D)	49 × 67.2 × 44.5 mm
Design	Split-core cable current transformer
Secondary connection	Cable
Touch protection	yes
Packaging (W × H × D)	80 × 155 × 63 mm
Rated current	100, 125, 150, 200, 250 A
Instrument security factor	FS 5

Drawings and views

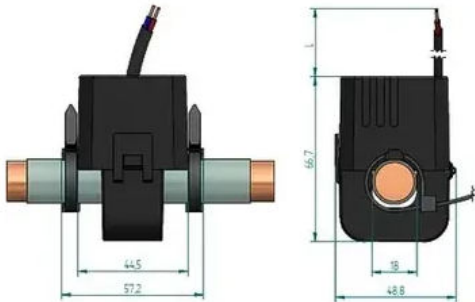

Masszeichnung-1

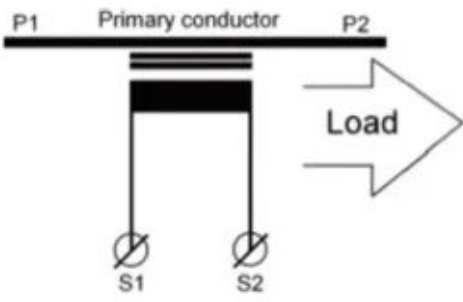

Schaltplan-1



Auf

Types						
Output	Cl.	Rated current A				
		100	125	150	200	250
1 A	0.5	–	–	–	0.2 VA 70006-1128	0.2 VA 70006-1129
	1	0.2 VA 70006-1025	0.2 VA 70006-1026	0.2 VA 70006-1027	–	–
5 A	0.5	–	–	–	–	1 VA 70006-1031
	1	–	–	1 VA 70006-1053	1 VA 70006-1030	–

Conditions of use	
Normative standards	IEC 61869 part 1 + 2
Rated short-time thermal current	I _{th} = 60 x I _{pr} / 1 s
Rated continuous thermal current	I _{cth} = 1
Rated insulation level	0,72/3/-kV
Rated frequency	50 - 60 Hz
Insulation class	E / F / H

Environmental conditions	
Installation location	Indoor use
Ambient temperature	-10°C ... +55°C
relative humidity	5% ... 85%, no condensation
Altitude	up to 2000 m
Protection class (secondary terminals)	IP20
Remark	Only suitable for insulated conductor

Secondary cable		
Secondary current	Diameter	Length
1 A	0.5 mm	3 m
5 A	1.5 mm	0.5 m