



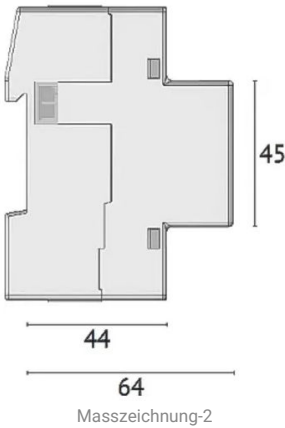

- Single-phase 80A energy meter
- Certified MID version
 - Direct connection up to 80 A
 - Fully bidirectional 4-quadrant measurements for all energies and powers
 - Class B according to EN 50470-3
 - Extension port for communication interface
 - 1 tariff input
 - S0 output for energy pulse output
 - LCD display with 7 main digits

Technical data			
Article no.	70143-1110	Meter type	elektronisch
Mounting	DIN-Schiene	Display type	LCD
Interface	KNX	Max. current	100 A
Measurement	Direktmessung	Rated current	0 - 80 A A
Web server	ohne Webserver	Mounting	DIN-Schienen Montage
Phases	Einphasig	Display digits	7
Display	digital	EAN	9502242791568

Drawings and views

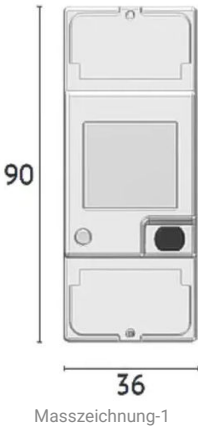

Documents	
• Instruction manual	